

light com
tration a
with capa
ns
strength
nce
r warranty f
ssels

A , A

Inner high densi
poly
Threaded inlet in
.5 in. 4 in

SPECIFICATIONS FOR PE LINER TANKS


Model	Dimensions (mm)		Dimensions (in.)		Weight (kg)	Weight (lb)	Stroke (mm)		Stroke (in.)
	W	H	W	H			A	B	
1. Model	7×17	180×430	2.5in.	N/A	431	185	2.3	8.6	Standard
	7×35	180×905	2.5in.	N/A	906	185	5.2	19.7	Standard
	7×44	180×1130	2.5in.	N/A	1128	185	6.7	25.4	Standard
2. Model	8×17	205×445	2.5in.	N/A	432	210	3.0	11.4	Standard
	8×35	205×905	2.5in.	N/A	901	210	6.6	25.0	Standard
	8×44	205×1130	2.5in.	N/A	1133	210	8.7	32.9	Standard
3. Model	9×35	230×905	2.5in.	N/A	904	233	8.3	31.4	Standard
	9×42	230×1085	2.5in.	N/A	1071	233	10.1	38.2	Standard
	9×48	230×1230	2.5in.	N/A	1247	233	11.8	44.7	Standard
10. Model	10×35	255×905	2.5in.	N/A	908	258	10.2	38.6	Standard
	10×40	255×1020	2.5in.	N/A	1024	258	11.7	44.3	Standard
	10×44	255×1130	2.5in.	N/A	1139	258	13.1	49.6	Standard
	10×54	255×1390	2.5in.	N/A	1390	258	16.4	62.1	Standard
12. Model	12×48	300×1235	2.5in.	N/A	1231	306	20.6	78.0	Standard
	12×52	300×1340	2.5in.	N/A	1328	306	22.2	84.0	Standard
1. Model	13×54	330×1400	2.5in.	N/A	1366	333	27.0	102.2	Standard
1. Model	14×65	355×1670	2.5in.	N/A	1656	370	38.0	143.8	Standard
	14×65	355×1670	4in.	N/A	1660	370	38.0	143.8	Standard
12. Model	16×65	400×1670	2.5in.	N/A	1671	409	49.0	185.5	Standard
	16×65	400×1670	4in.	N/A	1677	409	49.0	185.5	Standard
1. Model	18×65	450×1670	4in.	N/A	1693	472	64.0	242.3	SMC
21. Model	21×62	535×1690	4in.	N/A	1705	557	82.4	312.0	SMC
	21×62	535×1690	4in.	4in.	1949	557	82.4	312.0	TRIPOD

* Measurements are subject to change without notice and are for reference only.


* Please refer the individual drawing for dimension, volumes and weight etc.




Detail 2.5 in. opening



Detail 4 in. opening



Detail base

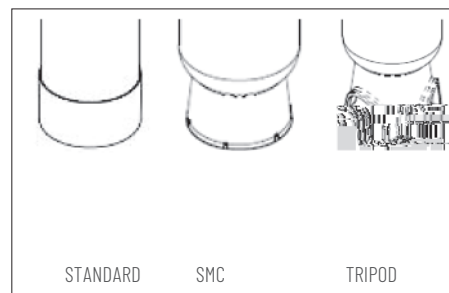

Pentair Water (SuZhu) Co.Ltd

Pentair Residential Filtration, LLC

0 20 A 202.2 00 A 202.2 0 00.2 0.

$A \rightarrow B$ is true if and only if B is true.

0212 1 201 A