

# JUNG PUMPEN COMPLI

RESIDENTIAL TECHNOLOGY

SEWAGE LIFTING STATIONS













# COMPLI SEWAGE LIFTING STATIONS

## READY TO PLUG-IN ▪ POWERFUL

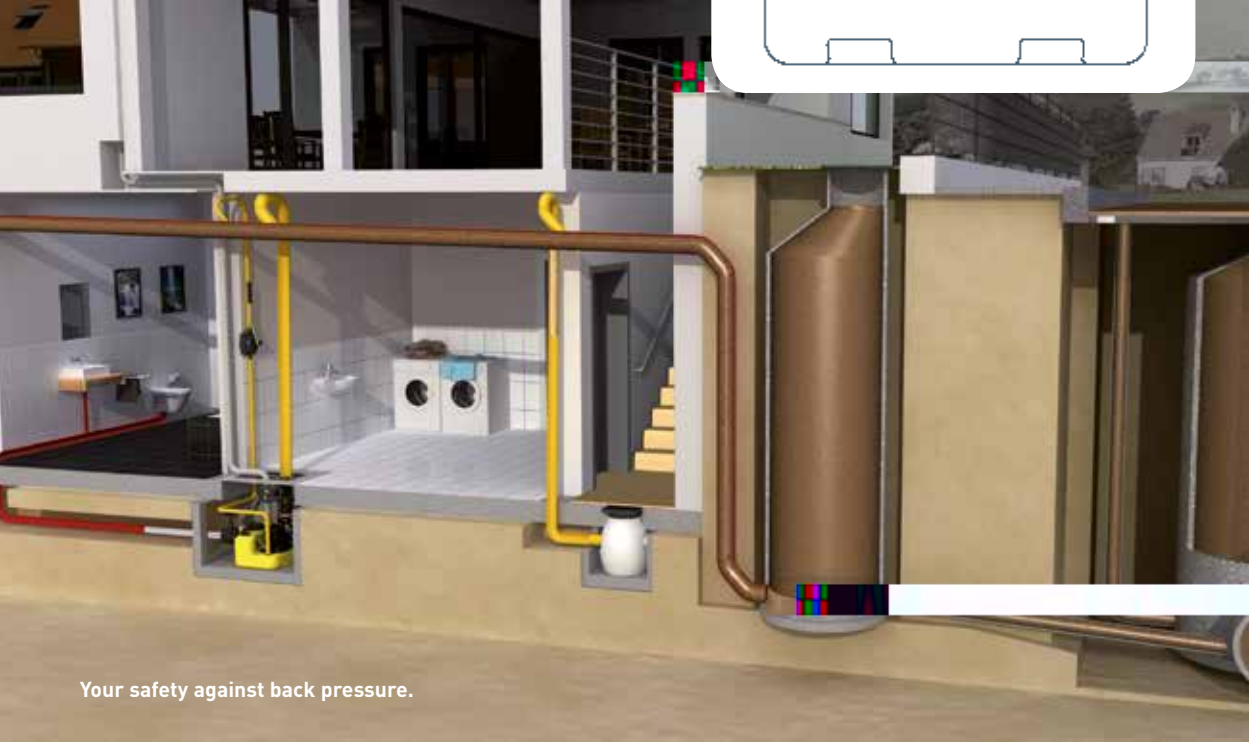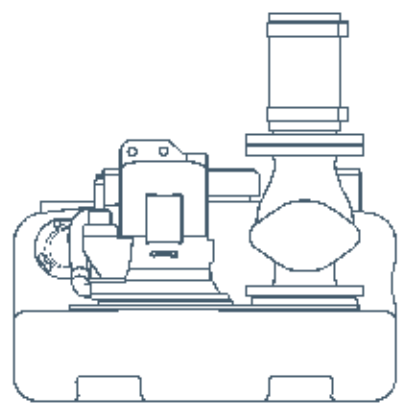

### NUMBERS - DATES - FACTS

| compli                | Dimensions<br>h x w x d [mm] | Tank<br>capacity [l] | Hmax<br>[m] | Qmax<br>[m³/h] | Free passage<br>[mm] | Inlet height<br>[mm] |
|-----------------------|------------------------------|----------------------|-------------|----------------|----------------------|----------------------|
| Single units          |                              |                      |             |                |                      |                      |
| 300 E                 | 445 x 525 x 525              | 50                   | 10,5        | 29             | 50                   | 180                  |
| 400                   | 445 x 650 x 595              | 64                   | 7           | 48             | 70                   | 180/250              |
| 500                   | 600 x 835 x 690              | 115                  | 20          | 76             | 70                   | variable             |
| 100 MultiCut          | 450 x 500 x 636              | 38                   | 24          | 18             | 7                    | 180/250              |
| 500 MultiCut          | 600 x 835 x 690              | 115                  | 24          | 18             | 7                    | variable             |
| Duplex units          |                              |                      |             |                |                      |                      |
| 1000                  | 600 x 835 x 690              | 115                  | 20          | 76             | 70                   | variable             |
| 1200                  | 800 x 910 x 1010             | 350                  | 20          | 76             | 70                   | 560-700              |
| 1500                  | 820 x 910 x 1610             | 500                  | 22          | 100            | 70 / 100             | 700                  |
| 2500                  | 820 x 1955 x 1610            | 2 x 500              | 22          | 100            | 70 / 100             | 700                  |
| 1000 MultiCut         | 600 x 835 x 690              | 115                  | 24          | 18             | 7                    | variable             |
| Stainless steel units |                              |                      |             |                |                      |                      |
| 1200 Stainless steel  | 880 x 770 x 1142             | 270                  | 16          | 122            | 80 / 100             | 700                  |
| 1400 Stainless steel  | 985 x 970 x 1375             | 540                  | 16          | 122            | 80 / 100             | 800                  |
| 1600 Stainless steel  | 985 x 970 x 1882             | 900                  | 16          | 122            | 80 / 100             | 800                  |



Height adjustable clamping flange  
compli 400



COMPLI SEWAGE LIFTING STATIONS -  
CONVINC2 0 Td3 - 0 TdCONVINC2 0 Td3 - 0 TdCON  
--4.1.9re-4.3-3.71 1 44.P 141B-EN 2106ax +49 5



PVC inlet sluice valve  
DN 100 or DN 150, with pipe sockets  
bonded in, for the time-saving and  
space-saving direct connection to the  
inlet clamping flange.

